

*SLOTLIGHT III Preconfigs*

WHEN REPLACING PCB ASSEMBLIES, PLEASE WEAR AN ESD WRIST STRAP AND CONNECT IT TO ELECTRICAL GROUND

RISK OF FIRE AND ELECTRICAL SHOCK

Contact, improper installation, or improper servicing **MAY RESULT IN DEATH OR SERIOUS INJURY!** Fixture must be installed by a qualified electrician only. Fixture is intended for installation in accordance with the National Electrical Code, local and federal code specifications. Disconnect power at electrical panel before servicing. Retain these instructions for maintenance reference.

ADVERTENCIA: RIESGO DE INCENDIO O IMPACTO ELÉCTRICO


Conexión, instalación inapropiada o servicio incorrecto **PUEDE CAUSAR MUERTE O HERIDAS GRAVES.** La luminaria debe ser instalada únicamente por un eléctrico calificado. La luminaria debe instalarse de acuerdo al Norma eléctrica nacional, al igual que especificaciones locales y normas federales. Se debe desconectar la corriente eléctrica antes de realizar la mantención. Conservar estas instrucciones como referencia para futuras mantenciones.

ATTENTION: RISQUE D'INCENDIE ET D'ELECTROCUTION

Une installation, un entretien ou un contact physique non conforme pourraient mener à un **DANGER DE MORT OU DE BLESSURE GRAVE!** L'appareil doit être installé uniquement par un électricien professionnel qualifié. L'installation doit respecter le code électrique national de même que les lois locales et fédérales en vigueur. Veuillez fermer l'alimentation électrique au panneau principal avant tout entretien. Conserver ces instructions pour référence et tout entretien futur.



NOTE

National or municipal codes must be followed regarding fixture installation and set back of thermal insulating material from luminaire. As a guideline, any insulation material must be held away from the luminaire by minimum of 3". Fixtures are not designed for direct contact with thermal insulation.

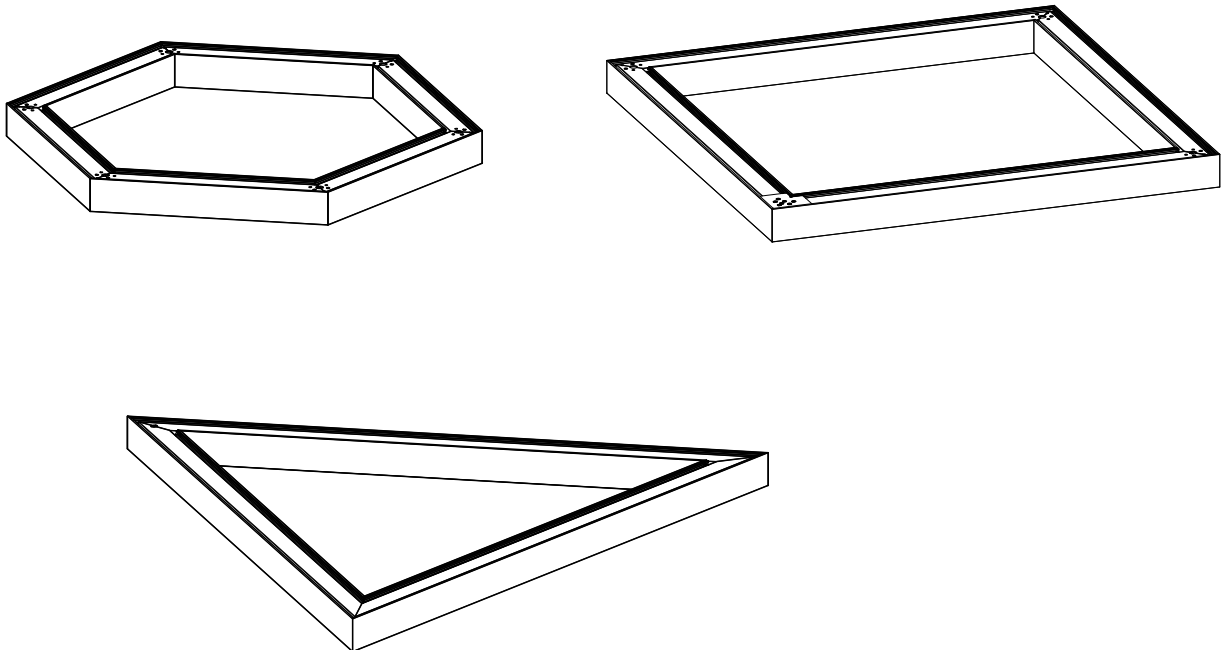

i Overview

Hexagon


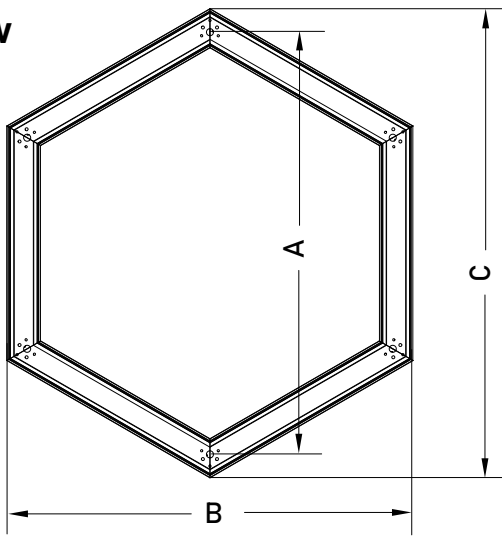


Width	Weight LB/FT
2.5"	4

Hexagon


Size	Centerline Dim per leg (in) A	Overall Dim (in) B x C
2'	29.30"	28.21" x 32.58"
3'	36.00"	34.01" x 39.27"
4'	47.13"	43.65" x 50.41"

Square or Rectangle

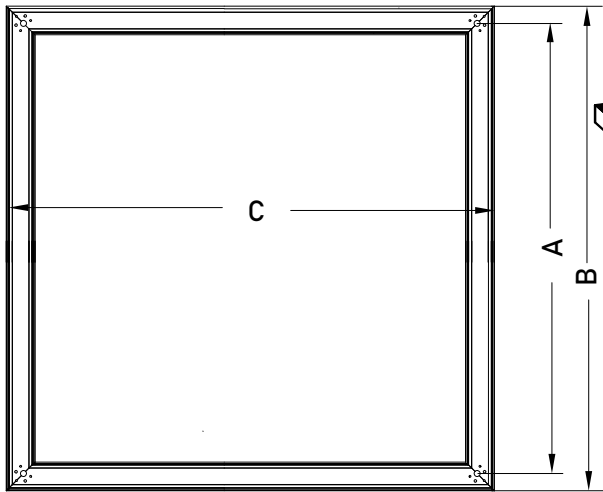

Square

Size	Centerline Dim per leg (in) A	Overall Dim (in) B x C
2'	24.00"	26.83" x 26.83"
3'	36.00"	38.83" x 38.83"
4'	48.00"	50.83" x 50.83"


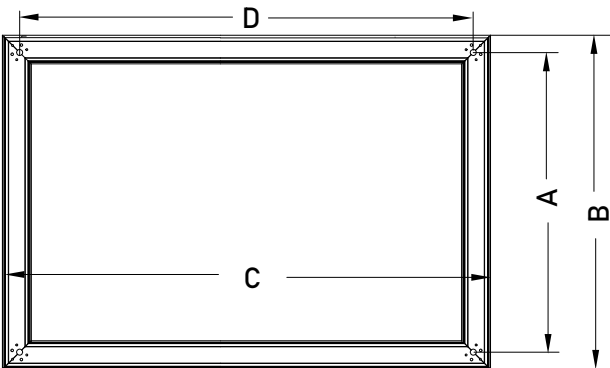


Rectangle

Size	Centerline Dim per leg (in) A x D	Overall Dim (in) B x C
1' x 2'	12.00" x 24.00"	14.83" x 26.83"
2' x 3'	24.00" x 36.00"	26.83" x 38.83"
3' x 4'	36.00" x 48.00"	38.83" x 50.83"

Width	Weight LB/FT
2.5"	4

Triangle

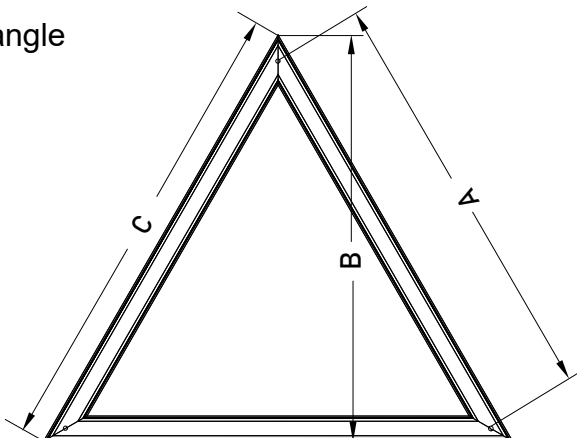


Width	Weight LB/FT
2.5"	4


Triangle

Size	Centerline Dim per leg (in) A	Overall Dim (in) B x C
2'	24.00"	25.04" x 28.91"
3'	36.00"	35.43" x 40.91"
4'	48.00"	45.82" x 52.91"

i Pendant Wiring

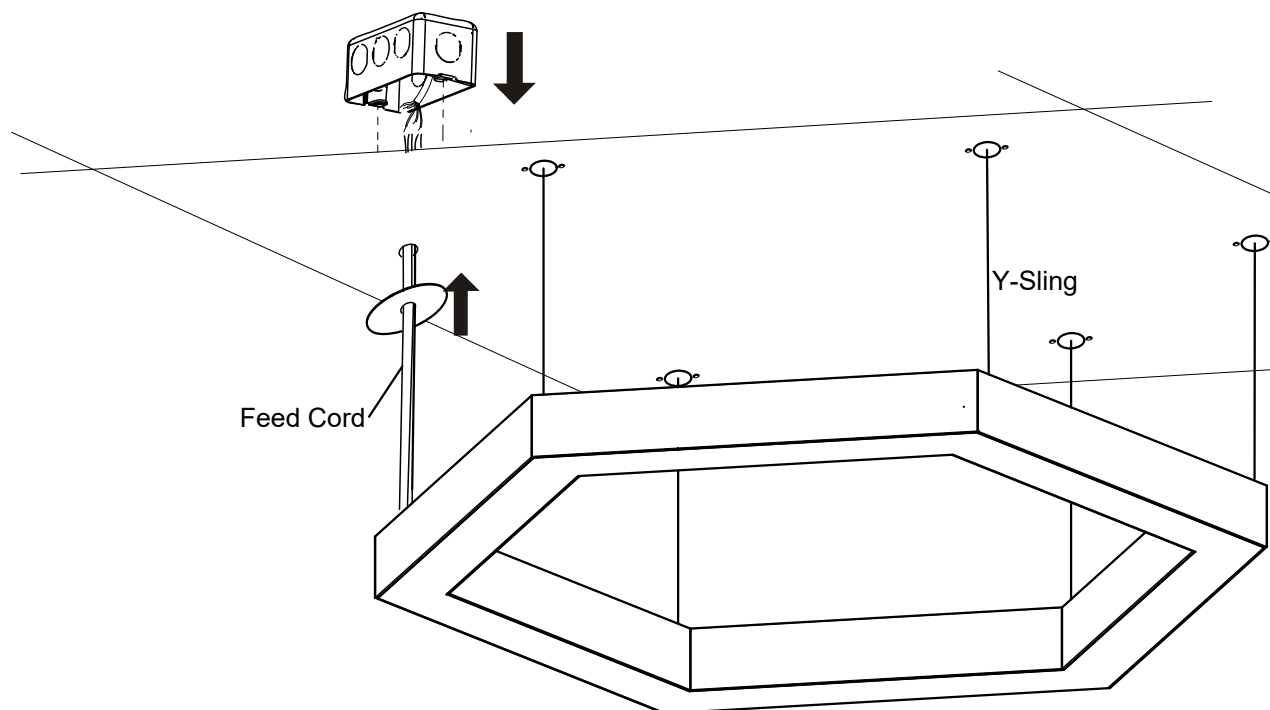


Color Codes	
Black	Switched Hot
White	Neutral
Green	Ground
Red	Unswitched Hot
Violet	Control +
Gray	Control -

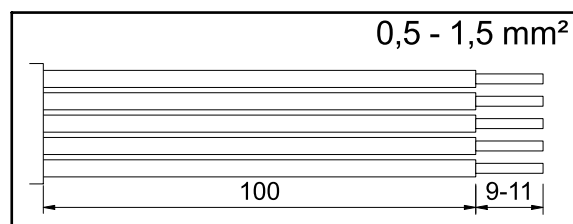


i Pendant Mounting

Unpack fixture. Fixture is shipped pre-assembled with power cord attached. Suspension hardware packaged separately from fixture.

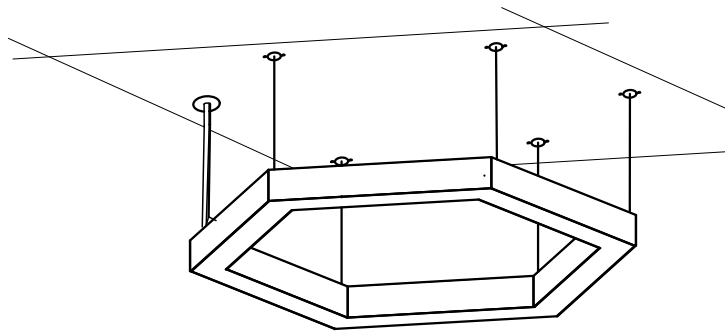


IMPORTANT:


1. Suspension cables should be perpendicular to the Housing
2. This installation requires proper support as each luminaire as being installed.
3. Suspensions cable and sling **MUST** be perpendicular to fixture and ceiling.

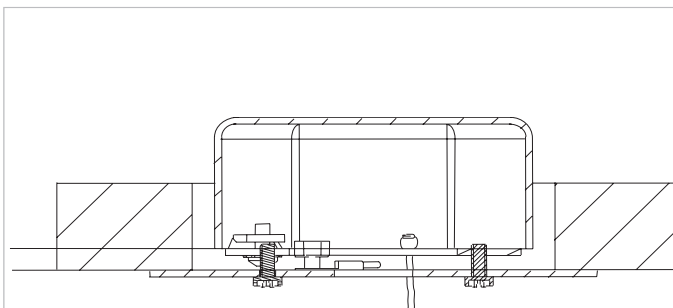

1 Install Mount junction box regressed above ceiling, , supplied by others, .

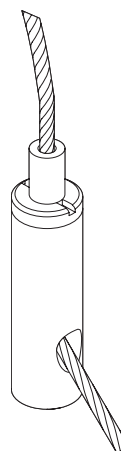


2 Mount Fixture Run suspension cables through holes in the canopy and through the holes in the 1/4-20 cable couplers. Canopy cutout must coincide with feed side. Adjust fixture mounting height.

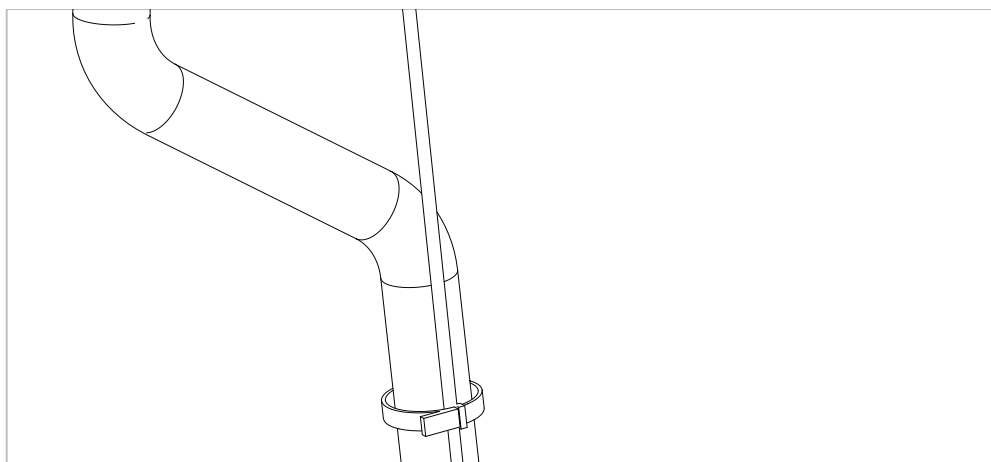



3 Determine Cord Length Follow cable path to junction box through the canopy. Secure cord to cable using wire ties, for strain relief. Remove excess cord with wire cutters, leaving enough for wiring.

i Lens Maintenance





Lens Cross Section

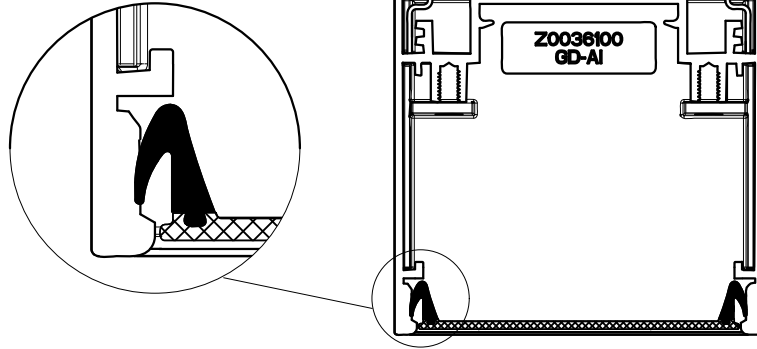

Lens Removal

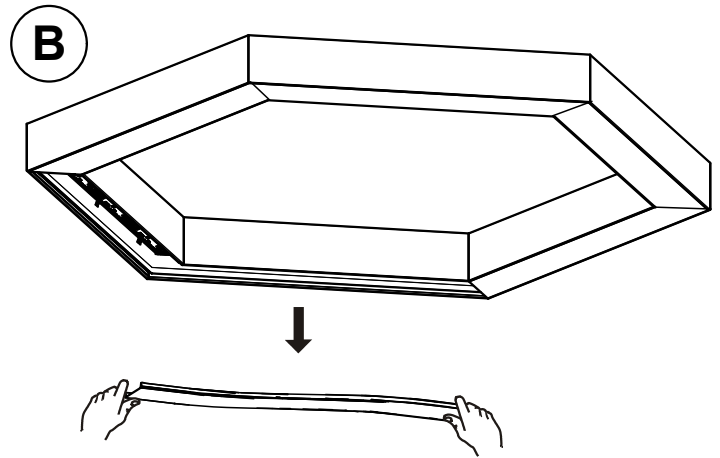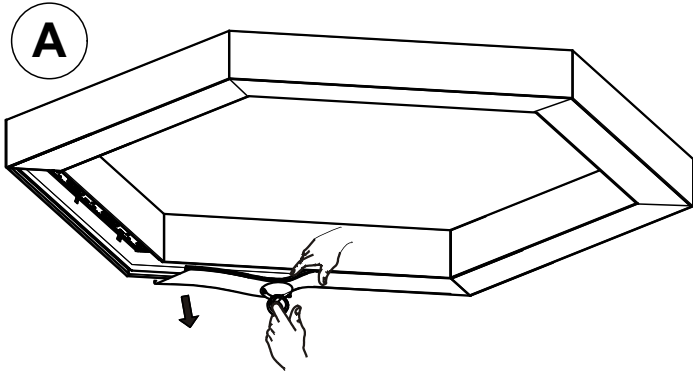

Lens install

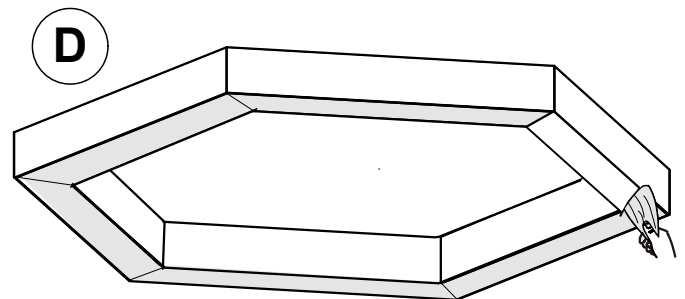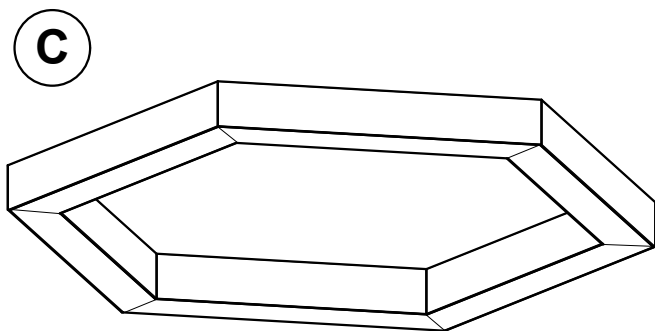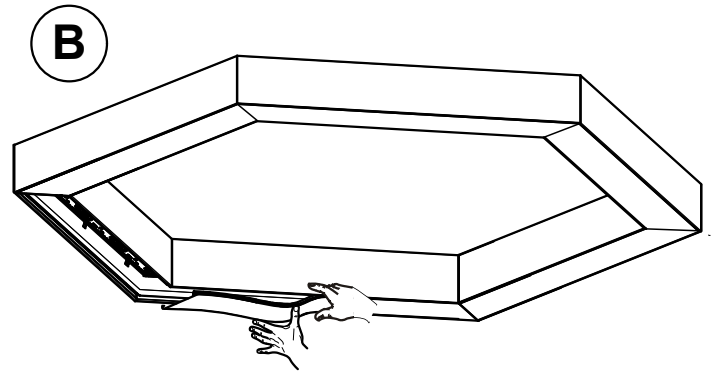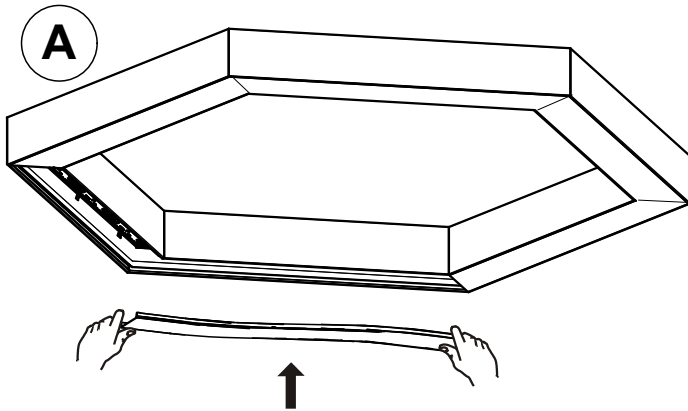

Once installed remove protective film