

**BASYS III**

WHEN REPLACING PCB ASSEMBLIES, PLEASE WEAR AN ESD WRIST STRAP AND CONNECT IT TO ELECTRICAL GROUND

RISK OF FIRE AND ELECTRICAL SHOCK

Contact, improper installation, or improper servicing MAY RESULT IN DEATH OR SERIOUS INJURY! Fixture must be installed by a qualified electrician only. Fixture is intended for installation in accordance with the National Electrical Code, local and federal code specifications. Disconnect power at electrical panel before servicing. Retain these instructions for maintenance reference.

ADVERTENCIA: RIESGO DE INCENDIO O IMPACTO ELECTRICO

Conexión, instalación inapropiada o servicio incorrecto PUEDE CAUSAR MUERTE O HERIDAS GRAVES. La luminaria debe ser instalada únicamente por un eléctrico calificado. La luminaria debe instalarse de acuerdo al Norma eléctrica nacional, al igual que especificaciones locales y normas federales. Se debe desconectar la corriente eléctrica antes de realizar la mantención. Conservar estas instrucciones como referencia para futuras mantenciones.

ATTENTION: RISQUE D'INCENDIE ET D'ELECTROCUTION

Une installation, un entretien ou un contact physique non conforme pourraient mener à un DANGER DE MORT OU DE BLESSURE GRAVE! L'appareil doit être installé uniquement par un électricien professionnel qualifié. L'installation doit respecter le code électrique national de même que les lois locales et fédérales en vigueur. Veuillez fermer l'alimentation électrique au panneau principal avant tout entretien. Conserver ces instructions pour référence et tout entretien futur.

Maintenance - Turn off power first!


To replace LED Boards:

- 1) Do not remove geartrays, Zumtobel offers kits to replace the LED Boards
- 2) Be sure to wear ESD protection!


To replace Driver:



- 1) Contact Zumtobel for authorization
- 2) Be sure to wear ESD protection!


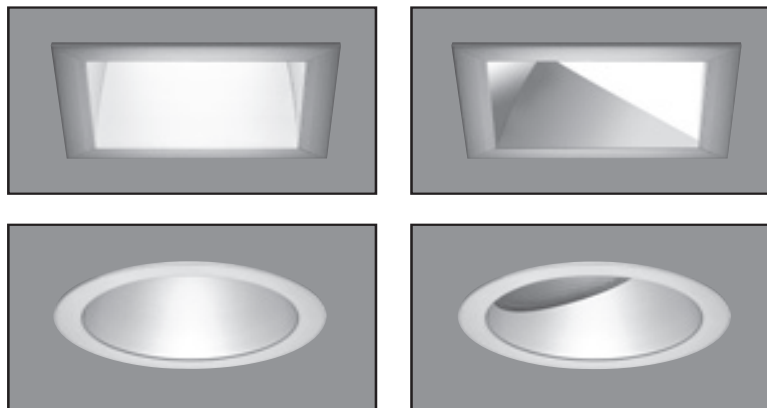
When replacing PCB Assemblies, please wear an ESD wrist strap and connect it to the metal enclosure.





Overview




Fixture	 8.75 LBS
Fixture W/EM	 11.1 LBS

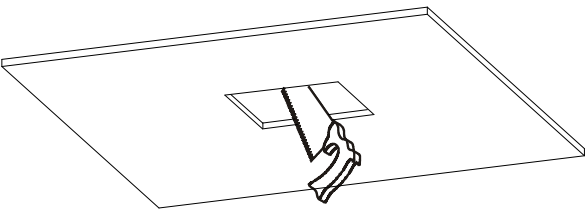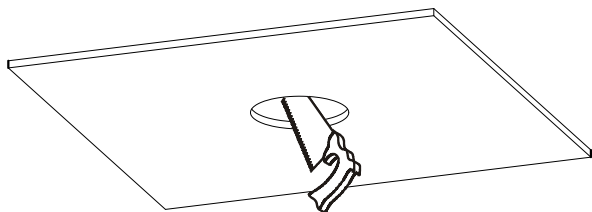

4 inch Square Ceiling Cutout = 5 1/4" x 5 1/4"
4 inch Round Ceiling Cutout = 5 1/4" Dia.

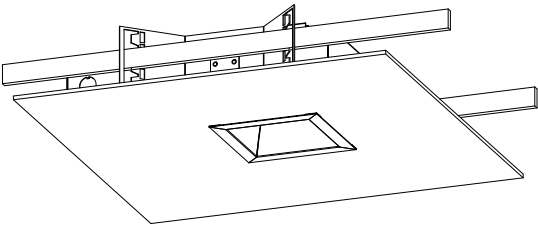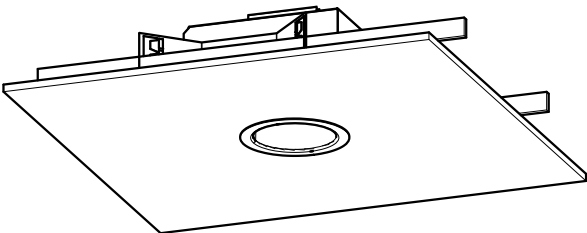

Wiring

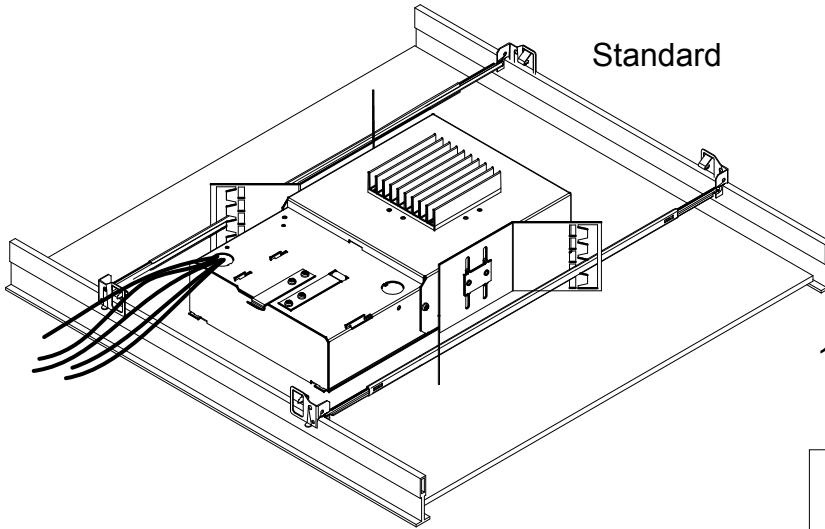

Standard

For Standard Config

18Ga Pigtail


May not be present depending on driver options

Color Codes	
Black	Load
White	Neutral
Green	Ground
Red	Unswitched Hot
Violet	Control +
Pink	Control -

For Tunable White Options

May not be present depending on driver options

Color Codes	
Black	Load
White	Neutral
Green	Ground
Red	Unswitched Hot
Violet	Intensity +
Pink	Intensity -
Violet	Color Temp +
Pink	Color Temp -

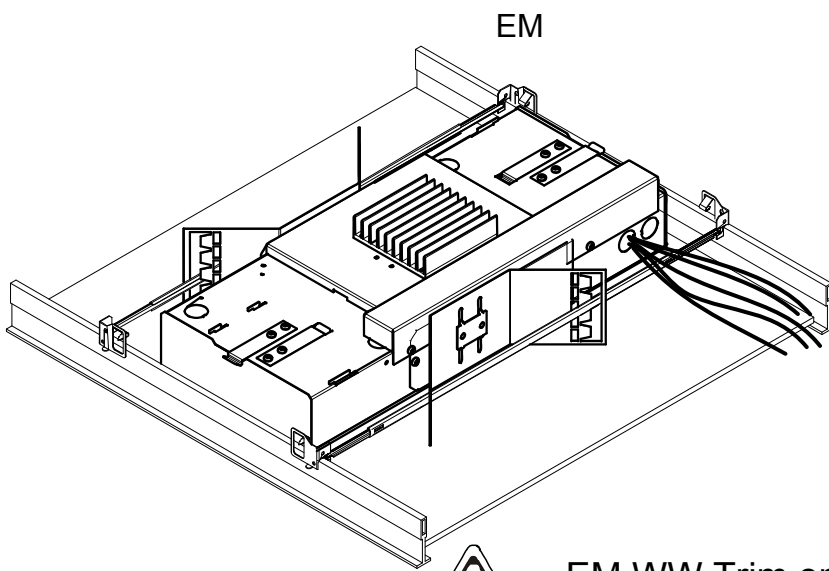


EM



EM WW Trim only truns at 90° clicks

Mounting

For Non-Flanged

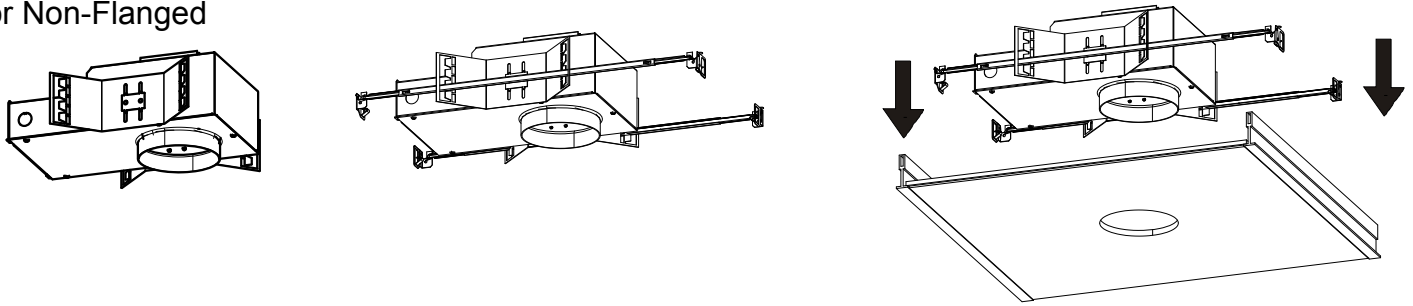

For Non-Flange fixtures: Adjust mounting brackets so bottom of flange is stick out from the ceiling 1/8"

