



INTEGRAL

Downlight Variety

3, 6, 9 Cell lengths
12°, 27° and 49° beam spreads
540 lm – 3000 lm range
Clear specular, Specular black
and White reflectors



Dimming Options

0–10 V, wireless, DALI,
Lutron, or remote EM

Color Temperature


3000K, 3500K, 4000K

Color Rendering

CRI 90+



Smooth Wall Washing

9 cell length
31" – 39" on center spacing
1300 lm - 1500 lm range
Black or White reflector option

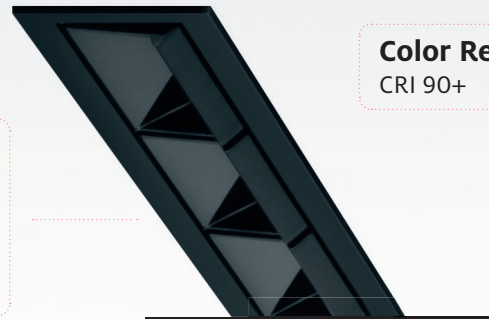

Big Adjustability

Adjustable 25° in all directions
6 cell length
12°, 27°, 49° beam spreads
940 lm – 1700 lm range
Clear specular, Specular black
and White reflectors

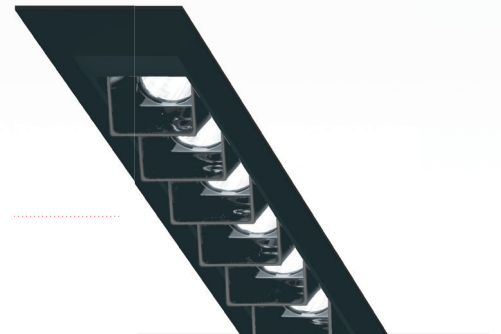

Contact a representative to begin specifying now.