




ZUMTOBEL

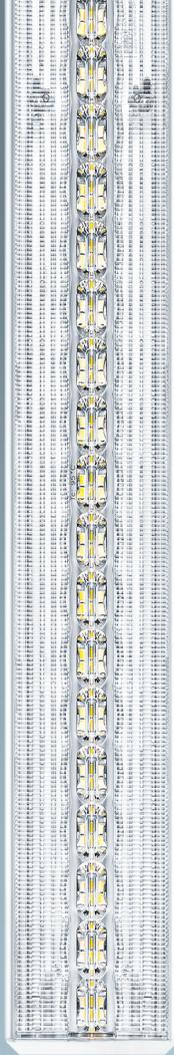

## TECTON

LINEAR TRUNKING SYSTEM

[zumtobel.us/tecton](http://zumtobel.us/tecton)



TECTON is the world's first continuous-row luminaire system to have a 7-pole current conducting section built into its trunking. TECTON copes effortlessly with various lighting requirements – at the time it is installed and whenever there are changes. The trunking system forms the functional backbone and then it is simply a matter of replacing or adding luminaire elements, light sources or optics as required.

## Flexible and Versatile


Grocery Stores

Education

Retail

Industry

Logistics

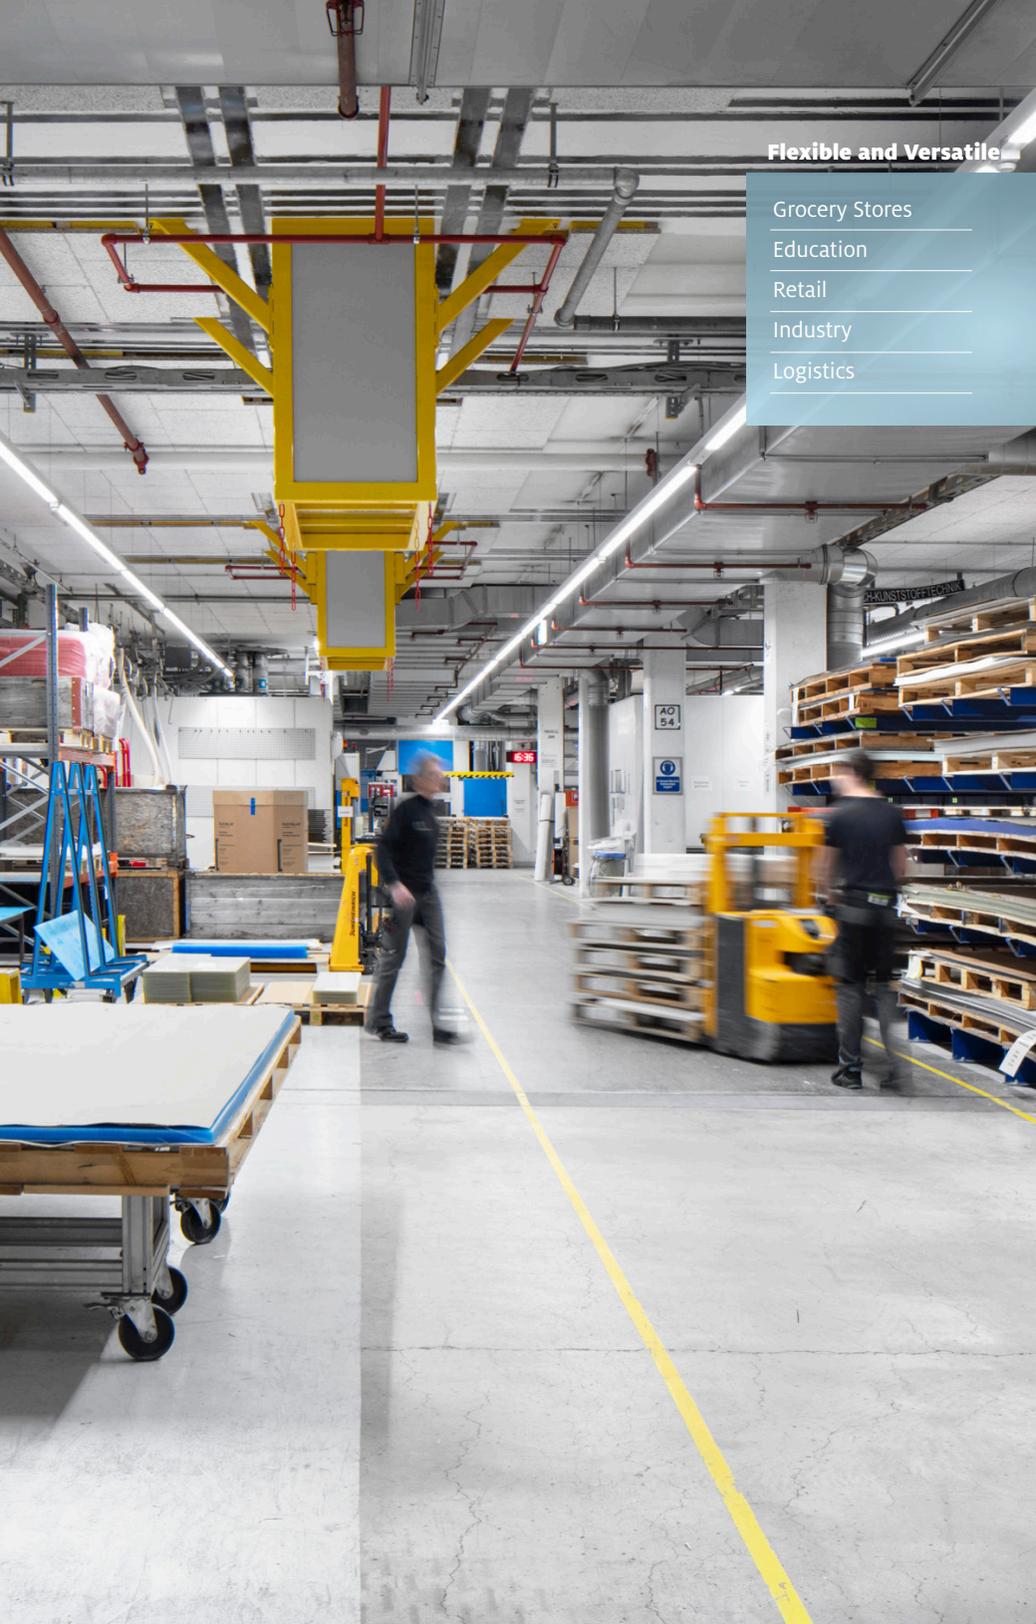

## **TECTON: A complete system**

Select trunking options, then choose luminaires.



## **TECTON LED Linear and Trunking System**

TECTON LED Linear is the new generation batten that easily snaps to Zumtobel's award winning TECTON trunking system. Featuring industry-leading efficacies of up to 172lm/W and a smaller, cleaner stylistic design with five optical distributions.



## **Quick Installation**


TECTON-compatible luminaires are quickly and securely installed to the TECTON trunking system thanks to a system that provides audible clicking and visible locking. Tried-and-tested features, such as plug&play and no-tool installation, make the TECTON product family time and cost efficient.

## TECTON Trunking Options



### Trunking Lengths

- 39" (1000 mm)
- 59" (1500 mm)
- 79" (2000 mm)
- 118" (3000 mm)
- 157" (4000 mm)



### L Node Connector

### T Node Connectors

### X Node Connector



## TECTON Luminaire Options

### TECTON B Basic





### MPO 59" (UGR < 19)

### ICOS 4' (UGR < 19)

### VIVO II M & L

### CRAFT II Performance and Plus M & L

### TECTON LED Linear 59" | 79"



# TECTON LED Linear



## Length

59" (1500 mm)

## Delivered Lumens

5500 lm | 8000 lm

## Watts

35 W | 52 W

## Efficacy

up to 167 lm/W

## Light Distribution

Wide Beam | Narrow Beam  
Shelf Beam | Wallwasher,  
UGR < 19

## UGR

< 19 with wide beam accessory  
< 22 all beams

## Length

79" (2000 mm)

## Delivered Lumens

7400 lm | 10000 lm

## Watts

46 W | 63 W

## Efficacy

up to 172 lm/W

## Light Distribution

Wide Beam | Narrow Beam  
Shelf Beam | Wallwasher,  
UGR < 19

## UGR

< 19 with wide beam accessory  
< 22 all beams

CCT: 3000 K | 3500 K | 4000 K CRI: 80+

Narrow Beam



Wide Beam








UGR < 19  
(Wide Beam Only)




Shelf Beam



Wall Washer  
(Shelf Beam Only)



● Vertical plane distribution

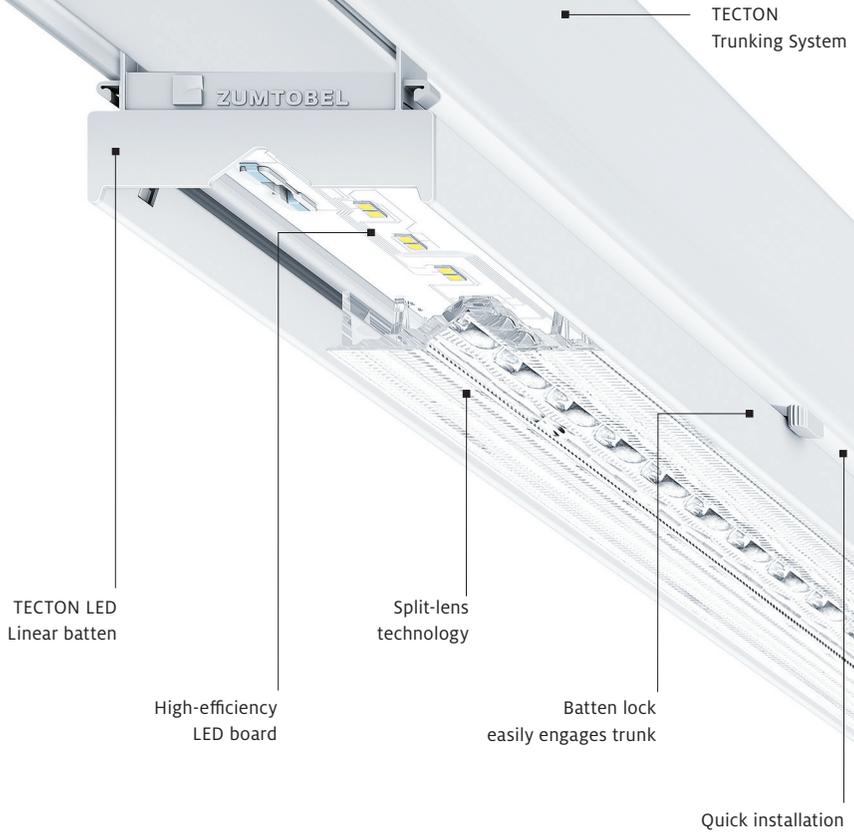

Long continuous rows with one electrical feed  
– up to 195 ft. max. run (120 V) | 449 ft. max. run (277 V)\*

Power supplies and lighting controls are completely integrated into the trunking

Easy plug&play installation with audible clicking and visible locking

Tool-free installation

Multiple luminaire options may be mounted to the trunking

Luminaires and suspension systems can be changed in the field

7 pole current conducting sections allow for maximum system flexibility  
– 3 Switchable legs | 2 Dimming | 1 Neutral | 1 Ground

\*TECTON LED Linear 59'

T H E   L I G H T

**[zumtobel.us/contacts](https://zumtobel.us/contacts)**

EN 04/2024 © Zumtobel Lighting Inc.  
*We reserve the right to make technical changes without notice.*