





TECTON® TRUNKING

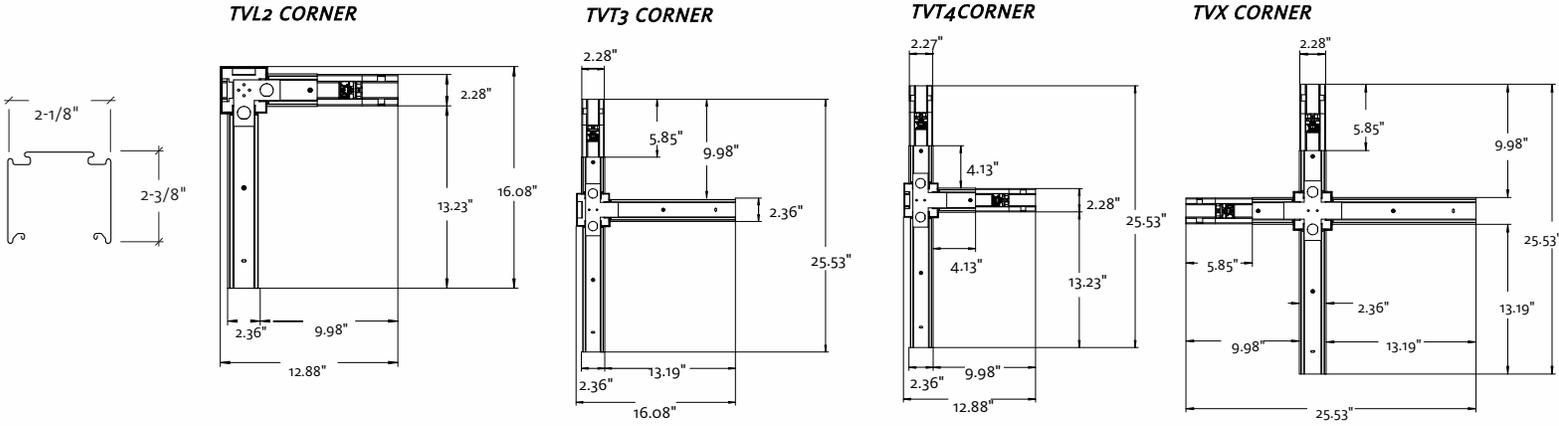


Using various node connectors, the TECTON® continuous-row lighting system can be assembled and combined in a myriad of variants from opened to closed configurations (consult factory for all configurations). Below is a grid configuration as an example.

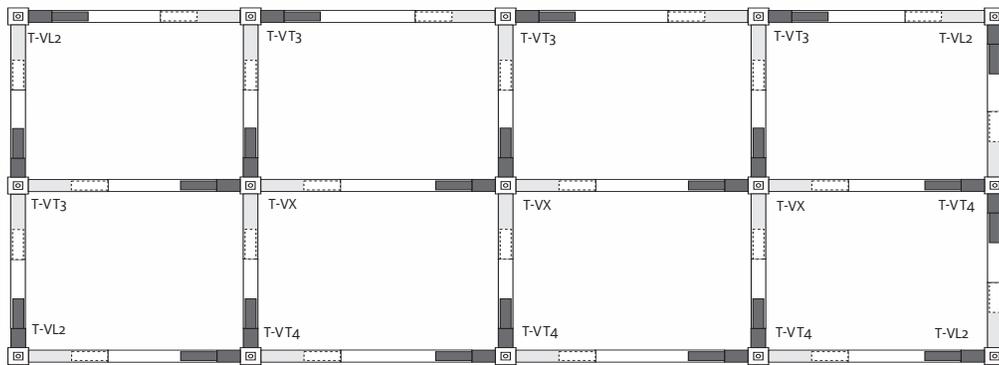


MOUNTING DETAILS


T-bar Mounted with Power Feed

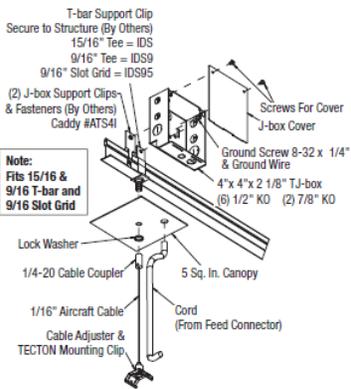


J-box Mounted with Power Feed



J-box Mounted Non-Power Feed

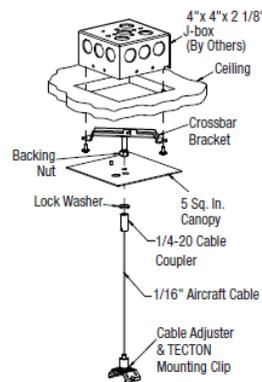

1/4-20 Fastener Non-Power Feed – 2\"/>

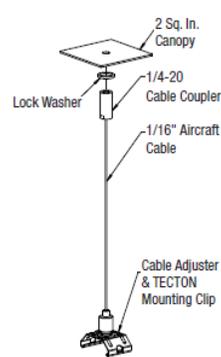

1/4-20 Fastener Non-Power Feed – 5\"/>

