



Large Trackhead

VIVO II

Large Trackhead for TECTON

- Driver integrated into the housing
- Die-cast aluminum housing
- Available distributions: Spot 15°, Medium Spot 19°, Flood 26°, Wide Flood 43°, Very Wide Flood 52° and Vertical Light Optic (uniform illumination of walls and vertical surfaces) 43°
- Rotatable through 337° and pivotable through 90°
- Glare control via front ring made of polycarbonate, black or white, other colors, such as concrete grey, chrome-color or copper-color are available as accessories
- 50,000 h service life at 80% luminous flux
- Reflector of aluminized polycarbonate, highly specular, iridescence-free
- Luminaire body color: black or white microtextured paint standard, other colors such as matte silver, concrete grey, chrome-color or copper-color are possible as variants via CPD

IBEW UNION MADE

DELIVERED LUMENS	COLOR TEMPERATURE	COLOR RENDERING	WATTS
Up to 3600 lm	3000 K 3500 K 4000 K (MacAdam 3 Step)	CRI 90+	37 W

Order Code

V2	L	IH	HO	5	U	TEC	8	9	10
-----------	----------	-----------	-----------	----------	----------	------------	----------	----------	-----------

1	FIXTURE	V2 VIVO II
2	SIZE	L Large
3	TYPE	IH In-Housing
4	OUTPUT	HO 37 W
5	LED MODULE	930 90 CRI / 3000 K 935 90 CRI / 3500 K 940 90 CRI / 4000 K
6	DRIVER	U 0-10 V
7	ADAPTER	TEC TECTON
8	BEAM SPREAD	FL Flood MS Medium Spot SP Spot WF Wide Flood VF Very Wide Flood VL Vertical Light Flood
9	FRONT RING COLOR ¹	BK Matte Black WH Matte White CH Chrome Glossy CO Copper Glossy CG Concrete Grey DG Dark Grey SM Matte Silver WG White Glossy BG Black Glossy
10	BODY COLOR ¹	BK Black WH White


Declare.

Suitable for Damp Locations

¹ Standard color combination of Matte Black Front Ring-Black Body and Matte White Front Ring -White Body have 4-6 week lead, all other color combinations have lead time of 8-10 weeks.

Accessories Order Code



60700436 Bending Optic	V2 L BOPT	60700467 Front Ring Black	V2 L Frontring BK
60700446 Vertical Light Optic	V2 L VOPT	60700468 Front Ring Glossy Black	V2 L Frontring BKG
60700440 Soft Outline Lens	V2 L Soft Outline Lens	60700473 Front Ring Chrome	V2 L Frontring CRG
60700438 Oval Outline Lens	V2 L Oval Outline Lens	60700472 Front Ring Copper	V2 L Frontring CUG
60700437 Honeycomb Louver BK	V2 L Honeycomb Louver BK	60700471 Front Ring Concrete Grey	V2 L Frontring GYC
60700439 Protection Glass	V2 L Protection Glass	60700470 Front Ring Dark Grey	V2 L Frontring GYD
60700442 Interchangeable Reflector, Medium Spot	V2 L REFL MSP	60700469 Front Ring Matte Silver	V2 L Frontring SM
60700443 Interchangeable Reflector, Flood	V2 L REFL FL	60700465 Front Ring White	V2 L Frontring WH
60700444 Interchangeable Reflector, Wide Flood	V2 L REFL WFL	60700466 Front Ring Glossy White	V2 L Frontring WHG
60700445 Interchangeable Reflector, Very Wide Flood	V2 L REFL VFL		

Track Order Code

Track elements must be ordered separately. Consult Global Trac™ specification sheets for order codes.

Light Distribution

Dimensions

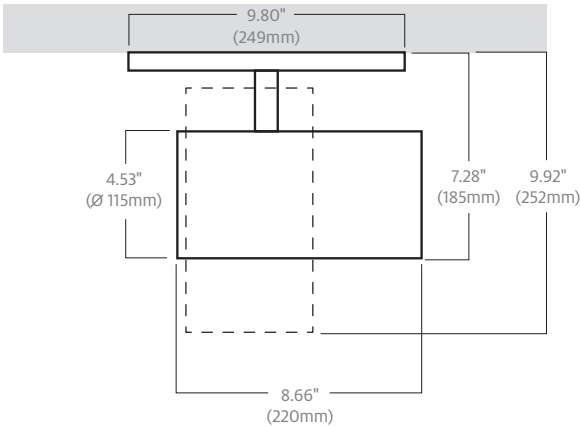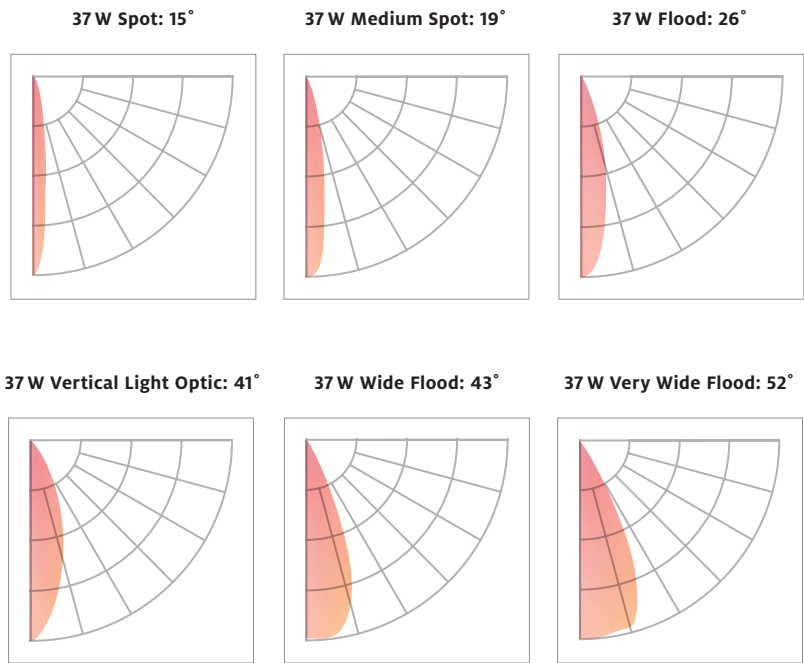

Technical Detail

- 1) Track:** VIVO II is compatible with TECTON trunking.

2) Wattage & CCT: Unit is available in 37 W, 3000 K, 3500 K, 4000 K and 90+ CRI.

3) Dimming: Unit is only available with a dimmable universal 120/277V driver. Driver is integrated in the spotlight housing.

4) Beam Spread: Unit is available with Spot 14°, Medium Spot 21°, Flood 29°, Vertical Light Optic 41°, Wide Flood 43°, or Very Wide Flood 52° beam spread.

- 5) Accessories:** Glare control via front ring made of polycarbonate white; front ring serves to accommodate the accessories (optical, protective glass, honeycomb louver).

6) Housing: The housing is made of die-cast aluminum painted white or black. Spotlight rotatable through 337° and tiltable through 90°.

7) Optic: Specular reflector made of polycarbonate highly reflective aluminized finish, iridescence-free; specular reflector designed to be interchangeable and retrofitted.

- 8) Life:** 50,000 hours, L80.

9) Weight: 3.19 lbs.