



Medium Trackhead

VIVO II

Medium Trackhead for TECTON

- Driver integrated into the housing
- Die-cast aluminum housing
- Available distributions: Spot 15°, Medium Spot 19°, Flood 26°, Wide Flood 43°, Very Wide Flood 52° and Vertical Light Optic (uniform illumination of walls and vertical surfaces) 43°
- Rotatable through 337° and pivotable through 90°
- Glare control via front ring made of polycarbonate, black or white, other colors, such as concrete grey, chrome-color or copper-color are available as accessories
- 50,000 h service life at 80% luminous flux
- Reflector of aluminized polycarbonate, highly specular, iridescence-free
- Luminaire body color: black or white microtextured paint standard, other colors such as matte silver, concrete grey, chrome-color or copper-color are possible as variants via CPD

IBEW UNION MADE

DELIVERED LUMENS	COLOR TEMPERATURE	COLOR RENDERING	WATTS
Up to 3600 lm	3000 K 3500 K 4000 K (MacAdam 3 Step)	CRI 90+	37 W

Order Code

V2	M	IH	HO	5	U	TEC	8	9	10
----	---	----	----	---	---	-----	---	---	----

1	FIXTURE	V2 VIVO II
2	SIZE	M Medium
3	TYPE	IH In-Housing
4	OUTPUT	HO 37 W
5	LED MODULE	930 90 CRI / 3000 K 935 90 CRI / 3500 K 940 90 CRI / 4000 K
6	DRIVER	U 0-10 V
7	ADAPTER	TEC TECTON
8	BEAM SPREAD	FL Flood MS Medium Spot SP Spot WF Wide Flood VF Very Wide Flood VL Vertical Light Flood
9	FRONT RING COLOR ¹	BK Matte Black WH Matte White CH Chrome Glossy CO Copper Glossy CG Concrete Grey DG Dark Grey SM Matte Silver WG White Glossy BG Black Glossy
10	BODY COLOR ¹	BK Black WH White


Declare

Suitable for Damp Locations

¹ Standard color combination of Matte Black Front Ring-Black Body and Matte White Front Ring -White Body have 4-6 week lead, all other color combinations have lead time of 8-10 weeks.


Accessories Order Code

60700458	Front Ring Black	V2 M Front Ring BK	60700435	Vertical Light Optic	V2 M VOPT
60700459	Front Ring Glossy Black	V2 M Front Ring BKG	60700429	Soft Outline Lens	V2 M Soft Outline Lens
60700464	Front Ring Chrome	V2 M Front Ring CRG	60700427	Oval Outline Lens	V2 M Oval Outline Lens
60700463	Front Ring Copper	V2 M Front Ring CUG	60700426	Honeycomb Louver BK	V2 M Honeycomb Louver BK
60700462	Front Ring Concrete Grey	V2 M Front Ring GYC	60700428	Protection Glass	V2 M Protection Glass
60700461	Front Ring Dark Grey	V2 M Front Ring GYD	60700430	Interchangeable Reflector, Spot	V2 M REFL SP
60700460	Front Ring Matte Silver	V2 M Front Ring SM	60700431	Interchangeable Reflector, Medium Spot	V2 M REFL MSP
60700456	Front Ring White	V2 M Front Ring WH	60700432	Interchangeable Reflector, Flood	V2 M REFL FL
60700457	Front Ring Glossy White	V2 M Front Ring WHG	60700433	Interchangeable Reflector, Wide Flood	V2 M REFL WFL
60700425	Bending Optic	V2 M BOPT	60700434	Interchangeable Reflector, Very Wide Flood	V2 M REFL VFL


Track Order Code

Track elements must be ordered separately. Consult Global Trac™ specification sheets for order codes.

Light Distribution

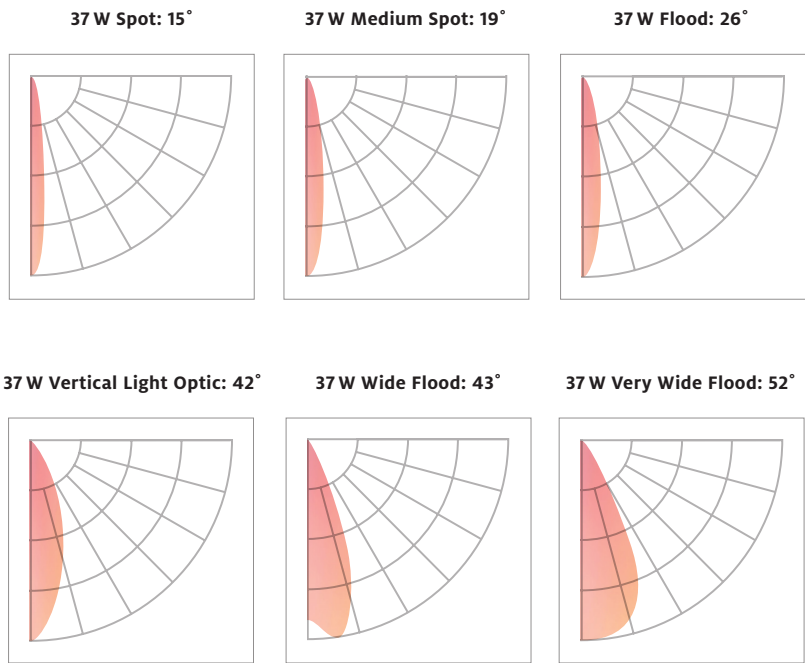

Dimensions

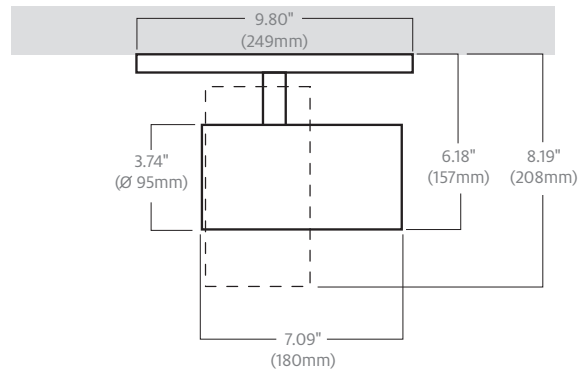

Technical Detail

- 1) Track:** VIVO II is compatible with TECTON trunking.

2) Wattage & CCT: Unit is available in 37 W, 3000 K, 3500 K, 4000 K and 90+ CRI.

3) Dimming: Unit is only available with a dimmable universal 120/277V driver. Driver is integrated in the spotlight housing.

4) Beam Spread: Unit is available with Spot 15°, Medium Spot 19°, Flood 26°, Vertical Light Optic 42°, Wide Flood 43°, or Very Wide Flood 52° beam spread.
- 5) Accessories:** Glare control via front ring made of polycarbonate white; front ring serves to accommodate the accessories (optical, protective glass, honeycomb louver).

6) Housing: The housing is made of die-cast aluminum painted white or black. Spotlight rotatable through 337° and tiltable through 90°.

7) Optic: Specular reflector made of polycarbonate highly reflective aluminized finish, iridescence-free; specular reflector designed to be interchangeable and retrofitted.
- 8) Life:** 50,000 hours, L80.

9) Weight: 2.3 lbs.