




ZUMTOBEL

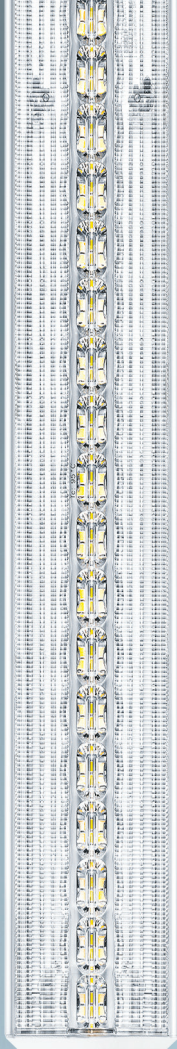

TECTON

LINEAR TRUNKING SYSTEM

zumtobel.us/tecton



TECTON is the world's first continuous-row luminaire system to have a 7-pole current conducting section built into its trunking. TECTON copes effortlessly with various lighting requirements – at the time it is installed and whenever there are changes. The trunking system forms the functional backbone and then it is simply a matter of replacing or adding luminaire elements, light sources or optics as required.

Flexible and Versatile

Grocery Stores

Education

Retail

Industry

Logistics



TECTON: A complete system

Select trunking options, then choose luminaires.



TECTON LED Linear and Trunking System

TECTON LED Linear is the new generation batten that easily snaps to Zumtobel's award winning TECTON trunking system. Featuring industry-leading efficacies of up to 172lm/W and a smaller, cleaner stylistic design with five optical distributions.



Quick Installation

TECTON-compatible luminaires are quickly and securely installed to the TECTON trunking system thanks to a system that provides audible clicking and visible locking. Tried-and-tested features, such as plug&play and no-tool installation, make the TECTON product family time and cost efficient.


TECTON Trunking Options

PENDANT	SURFACE
---------	---------



Trunking Lengths

39" (1000 mm)
59" (1500 mm)
79" (2000 mm)
118" (3000 mm)
157" (4000 mm)



L Node Connector

T Node Connectors

X Node Connector



TECTON Luminaire Options

TECTON B Basic





MPO 59" (UGR < 19)

ICOS 4' (UGR < 19)

VIVO II M & L

CRAFT II Performance and Plus M & L

TECTON LED Linear 59" | 79"



TECTON LED Linear



Length

59" (1500 mm)

Delivered Lumens

5500 lm | 8000 lm

Watts

35 W | 52 W

Efficacy

up to 167 lm/W

Light Distribution

Wide Beam | Narrow Beam
Shelf Beam | Wallwasher,
UGR < 19

UGR

< 19 with wide beam accessory
< 22 all beams

Length

79" (2000 mm)

Delivered Lumens

7400 lm | 10000 lm

Watts

46 W | 63 W

Efficacy

up to 172 lm/W

Light Distribution

Wide Beam | Narrow Beam
Shelf Beam | Wallwasher,
UGR < 19

UGR

< 19 with wide beam accessory
< 22 all beams

CCT: 3000 K | 3500 K | 4000 K CRI: 80+/90+

Narrow Beam



Wide Beam








UGR < 19
(Wide Beam Only)




Shelf Beam



Wall Washer
(Shelf Beam Only)



● Vertical plane distribution

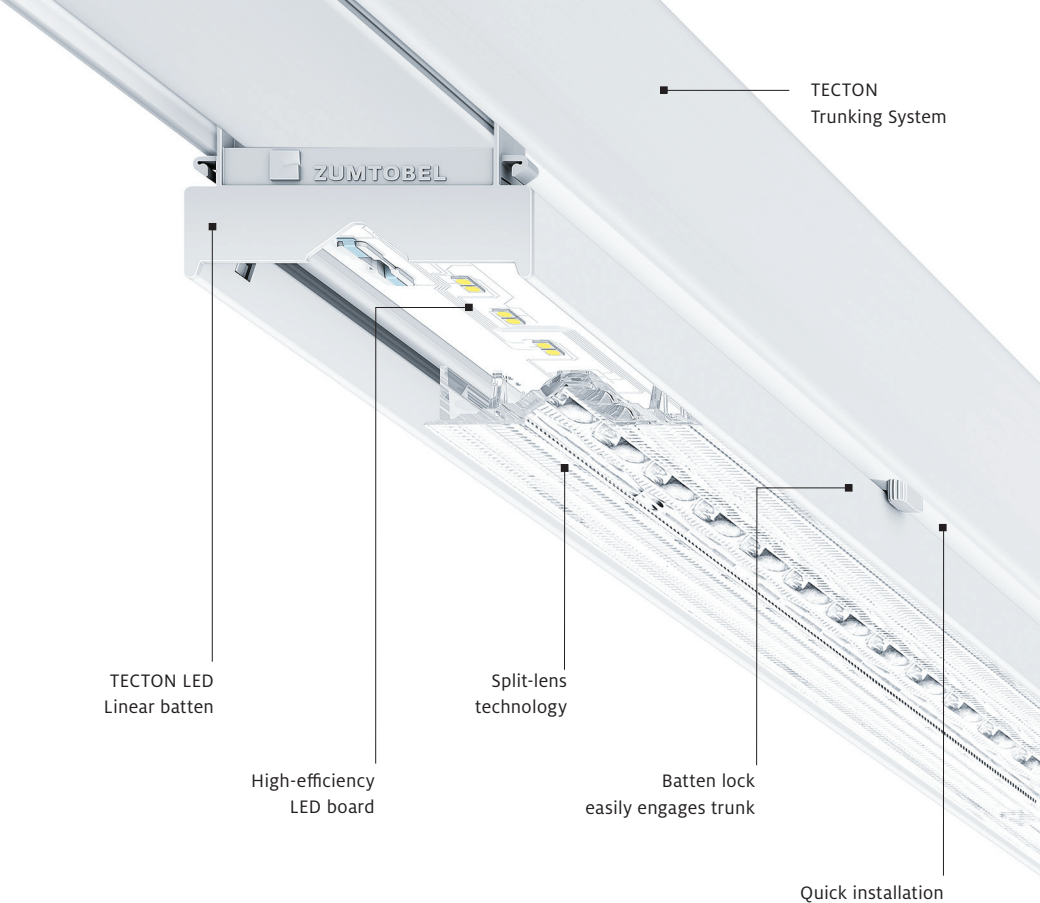

Long continuous rows with one electrical feed
– up to 195 ft. max. run (120 V) | 449 ft. max. run (277 V)*

Power supplies and lighting controls are completely integrated into the trunking

Easy plug&play installation with audible clicking and visible locking

Tool-free installation

Multiple luminaire options may be mounted to the trunking

Luminaires and suspension systems can be changed in the field

7 pole current conducting sections allow for maximum system flexibility
– 3 Switchable legs | 2 Dimming | 1 Neutral | 1 Ground

*TECTON LED Linear 59"

T H E L I G H T

zumtobel.us/contacts

EN 01/2026 © Zumtobel Lighting Inc.

We reserve the right to make technical changes without notice.