



LINETIK Pendant

Light Magic


Power feed through suspension cables

Housing Colors

Black, White, Silver

Minimalist Appeal

Section dimensions only
1" high x 1" wide

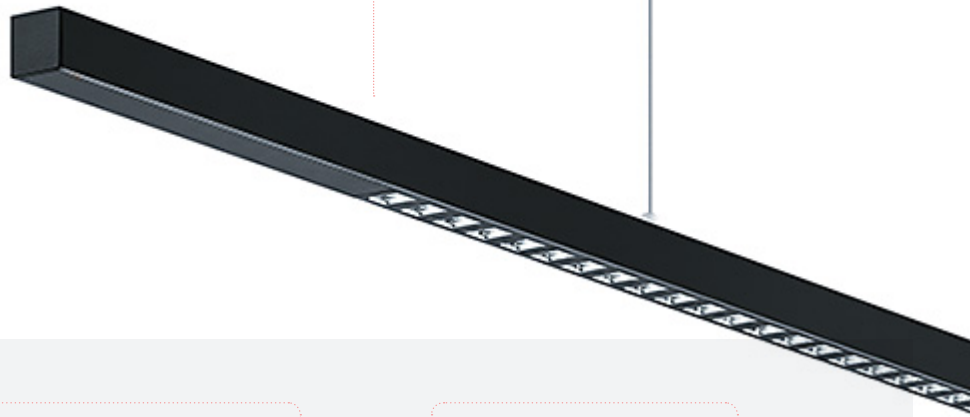

Color Rendering

CRI 80+

Distribution Characteristics

35% direct distribution and
65% indirect distribution

Available Dimming

0-10V DALI (for separate
control of uplight and
downlight)

Light Quality

Glare-free downlight –
UGR < 16 and wide indirect
uniform distribution

Color Temperature

3000 K, 4000 K

Lumens

Up to 1600 lm/ft at 115 lm/W

Contact a representative to begin specifying now.