

Straight Track




GLOBAL TRAC™

Pulse XTSC – Straight Track

- Independent neutrals: Enable greater capacity (2 X 20A); Dimming capability: dim on two independent circuits without harmonics or interference to the neutral conductor
- Oversized Conductors: For higher operating safety and reduced overload potential
- Secure Bus Bar Insulation: Firmly crimped insulation secures both conductors and insulation for product life
- Separate Mechanical Suspension Points: Provides superior weight bearing capacity; ensures electrical contact integrity and reduces the likelihood of arcing
- Polarity Ridge: Takes the guesswork out of connector and track alignments during installation
- Durable, dependable, and simple-to-install track system
- Order accessories and suspension separately – see the components specification sheet.
- Tracks are field cuttable

System Overview

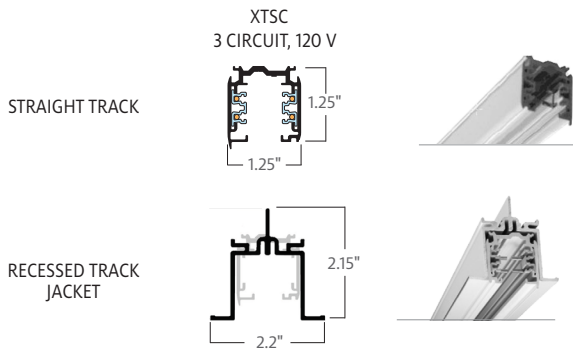

Surface Track Order Code

XTSC	2	3
1 TRACK ¹	XTSC Pulse XTSC 3-Circuit ² / 1-Neutral, 120 V ²	
2 LENGTH	604 4 Feet 608 8 Feet 6012 12 Feet	
3 COLOR	-1 Grey -2 Black -3 White	

¹ All track lengths can be cut to size on field. Curved track available upon request.

Recessed Track Order Code¹

FTP4	2	3
1 TRACK ¹	FTP4 Recessed track jacket	
2 LENGTH	604 4 Feet 608 8 Feet 6012 12 Feet	
3 COLOR	-1 Grey -2 Black -3 White	

¹ Order the applicable Track, then choose a Recessed Track Jacket per order code.

Components Order Code

Components must be ordered separately. [Link](#) to Suspension and Accessories >>>

Luminaires Order Code

Compatible luminaires must be ordered separately. [Link](#) to ARCOS ZF medium and large track heads >>>

