



ZUMTOBEL

ADJUSTABLE

LINEAR

WALL WASH

TRACK



LEDray

SUPERSYSTEM II

LEDray

- LED light insert with miniaturized high-efficiency lens optic (Advanced Optic), light control directly over the lenses
- Symmetric, direct distribution, without lateral light emission
- Glare control with L65 < 3000 cd/m² at 65° in all directions and UGR < 22



DELIVERED LUMENS

1300lm

WATTS

11W

COLOR TEMPERATURE

3000 K

COLOR RENDERING

CRI 80+

Order Code

SUP2

LEDray

LED 1300

8

5

LDO

7

1	FIXTURE	SUP2 SUPERSYSTEM II
2	TYPE	LEDray
3	OUTPUT	LED 1300
4	CRI	8 80 CRI
5	CCT	30 3000 K 40 4000 K
6	DIMMING	LDO Non-Potentiometer
7	COLOR	BK Black WH White

We reserve the right to change, without notice, specifications or materials. Supporting documentation found on zumtobel.us are the most recent versions and supersede all other versions that exist in any other printed or electronic form.

Zumtobel Lighting, Inc. ©2023

3300 Route 9W, Highland NY 12528-2630

845-691-6262 | 800-448-4131


info.us@zumtobelgroup.com

042623_F

Light Distribution



Dimensions

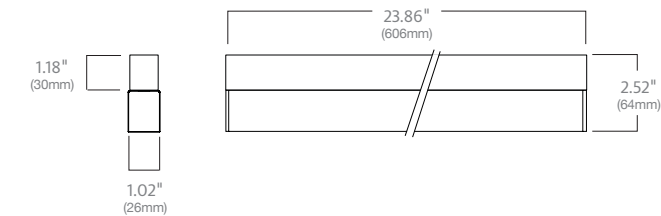

Technical Detail

- 1) Materials:** The luminaire is extruded aluminum, paint is a powder coat available in Black or White
- 2) Wattage & CCT:** The luminaire is 11W in MacAdam 3-step 3000 K or 4000 K. Available in 80+ CRI only.

- 3) Beam Spread:** LED light insert with miniaturized high-efficiency lens optic (Advanced Optic), light control directly over the lenses; symmetric, direct distribution, without lateral light emission.
- 4) Dimming:** Non-Potentiometer luminaire can be dimmed in line with the track with 0-10 V dimmer (by others).

- 5) Life:** 50,000 hours for luminous flux at 90% of initial value.
- 6) Weight:** 14 oz