

Spot Midi (single/double)

## SUPERSYSTEM II

Spot Midi (single/double)

- Spotlight luminaire available with one or two units
- Change light distribution from superspot to wideflood and oval with inserted films
- Delivered lumens: 243 lm – 639 lm (8.5 W)
- Dimming via integral potentiometer or via separate 0-10V control system

DELIVERED LUMENS*	WATTS	COLOR TEMPERATURE	COLOR RENDERING
243 lm – 592 lm	8.5 W	3000 K	CRI 90+
261 lm – 693 lm	8.5 W	4000 K	

\* Per luminaire



### Order Code




1	FIXTURE	<b>SUP2</b> SUPERSYSTEM II Adjustable
2	SIZE OF HEADS	<b>M</b> Midi
3	NUMBER OF HEADS	<b>1</b> Single   <b>2</b> Double
4	OUTPUT	<b>LED 250<sup>1</sup></b>   <b>LED 550</b>
5	CRI	<b>9</b> 90 CRI
6	CCT	<b>30</b> 3000 K   <b>40</b> 4000 K
7	OPTIC	<b>FL</b> Flood   <b>SP</b> Spot   <b>SSP</b> Super Spot <sup>1</sup>   <b>WFL</b> Wide Flood
8	DIMMING	<b>DIM</b> Potentiometer   <b>LDO</b> Non-Potentiometer
9	COLOR	<b>BK</b> Black   <b>WH</b> White

1 Only available with 8.5W, 250 lm Super Spot Optic.


### Accessories

CODE	DESCRIPTION
22169673	Anti-glare ring and film with flood distribution characteristic
22169676	Anti-glare ring and film with spot distribution characteristic
22169670	Anti-glare ring and film with wideflood distribution characteristic
22169667	Anti-glare ring and oval-outline film 1/3
22169664	Anti-glare ring and oval-outline film 1/60
22169682	Ring louver, black
22169685	Anti-glare cylinder, black
60210943	Mounting spring lock for vertical spotlight mounting (for standard low voltage adapter 48 V)

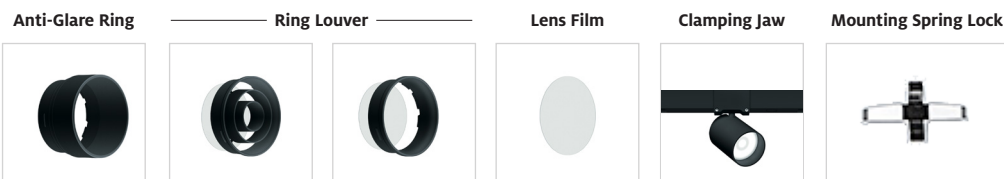


We reserve the right to change, without notice, specifications or materials. Supporting documentation found on zumtobel.us are the most recent versions and supersede all other versions that exist in any other printed or electronic form.

## Light Distribution

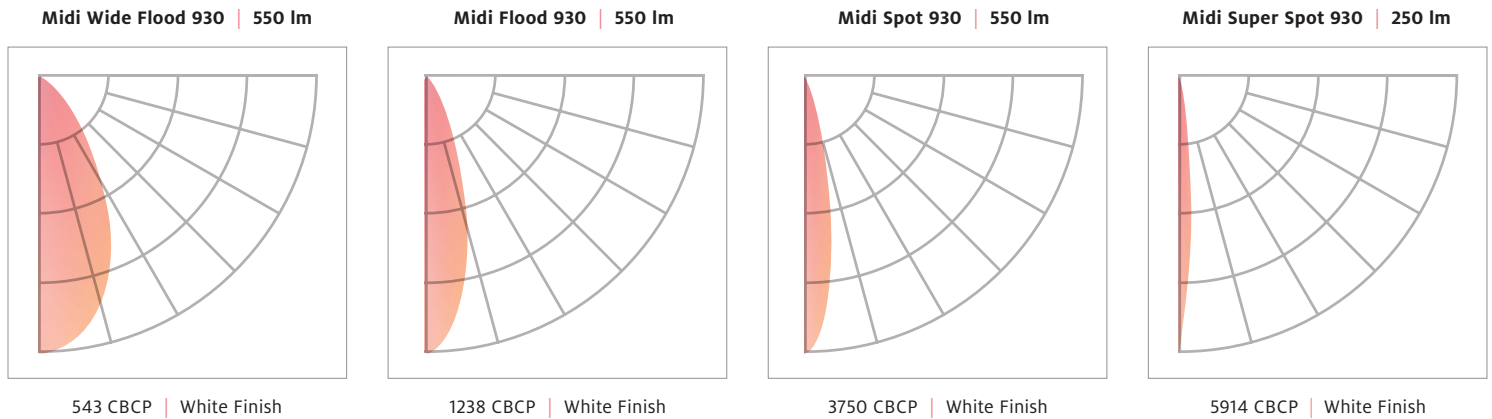


## Dimensions

### Single

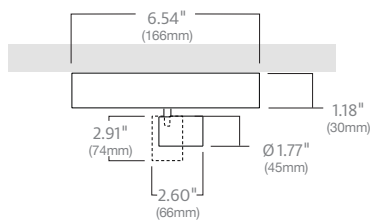

### Double

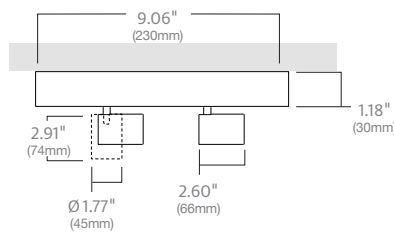

## Technical Detail

**1) Materials:** The lamp unit is made of die-cast aluminum, paint is a powder coat available in Black or White

**2) Wattage & CCT:** Heads are available in 8.5W MacAdam 3-step 3000 K or 4000 K. Available in 90+ CRI only.

**3) Beam Spread:** Unit is available with Spot, Super Spot, Flood, or Wide Flood beam spread.

**4) Dimming:** Non-Potentiometer unit can be dimmed in line with the track with 0-10 V dimmer (by others). When controlled with 0-10 V dimmer, order Non-Potentiometer version.

The Potentiometer unit enables the luminaire to dim independent of the track. The Potentiometer unit CANNOT be controlled by 0-10 V dimmer, can only dim via the Potentiometer.

**5) Accessories:** Anti glare ring and film, Ring Louver and Anti-glare cylinder are available.

**6) Tilt:** The unit can rotate through 360° and tilt through 90°.

**7) Life:** 50,000 hours for luminous flux at 70% of initial value.

**8) Weight:** Single Head: 8.0 oz, Double Head: 14.10 oz