



Spot Mini (single/triple)

## SUPERSYSTEM II

### Spot Mini (single/triple)

- Spotlight luminaire available with one or three units
- Change light distribution from superspot to wideflood and oval with inserted films
- Delivered lumens: 145 lm (3.3 W) – 350 lm (5 W)
- Dimming via integral potentiometer or via separate 0-10V control system

DELIVERED LUMENS*	WATTS	COLOR TEMPERATURE	COLOR RENDERING
100 lm – 145 lm	3.3 W	3000 K	CRI 90+
279 lm – 350 lm	5 W	4000 K	

\* Per luminaire



### Order Code




1	FIXTURE	<b>SUP2</b> SUPERSYSTEM II Adjustable
2	SIZE OF HEADS	<b>S</b> Mini
3	NUMBER OF HEADS	<b>1</b> Single   <b>3</b> Triple
4	OUTPUT	<b>LED 100<sup>1</sup></b>   <b>LED 350</b>
5	CRI	<b>9</b> 90 CRI
6	CCT	<b>30</b> 3000 K   <b>40</b> 4000 K
7	OPTIC	<b>FL</b> Flood   <b>SP</b> Spot   <b>SSP</b> Super Spot <sup>1</sup>   <b>WFL</b> Wide Flood
8	DIMMING	<b>DIM</b> Potentiometer   <b>LDO</b> Non-Potentiometer
9	COLOR	<b>BK</b> Black   <b>WH</b> White

1 Only available with 3.3W / 100 lm Super Spot Optic.


### Accessories

CODE	DESCRIPTION
22169674	Anti-glare ring and film with flood distribution characteristic
22169677	Anti-glare ring and film with spot distribution characteristic
22169680	Anti-glare ring and film with superspot distribution characteristic
22169671	Anti-glare ring and film with wideflood distribution characteristic
22169668	Anti-glare ring and oval-outline film 1/3
22169665	Anti-glare ring and oval-outline film 1/60
22169683	Ring louver, black
22169686	Anti-glare cylinder, black
60210943	Mounting spring lock for vertical spotlight mounting (for standard low voltage adapter 48 V)

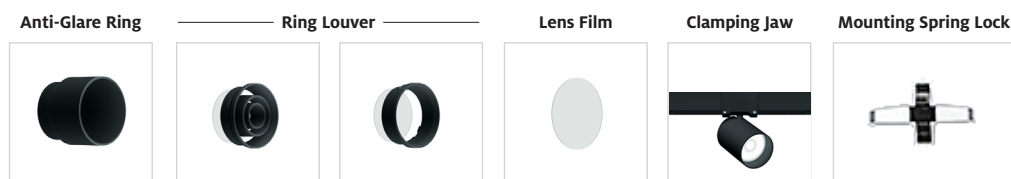


We reserve the right to change, without notice, specifications or materials. Supporting documentation found on zumtobel.us are the most recent versions and supersede all other versions that exist in any other printed or electronic form.

## Light Distribution

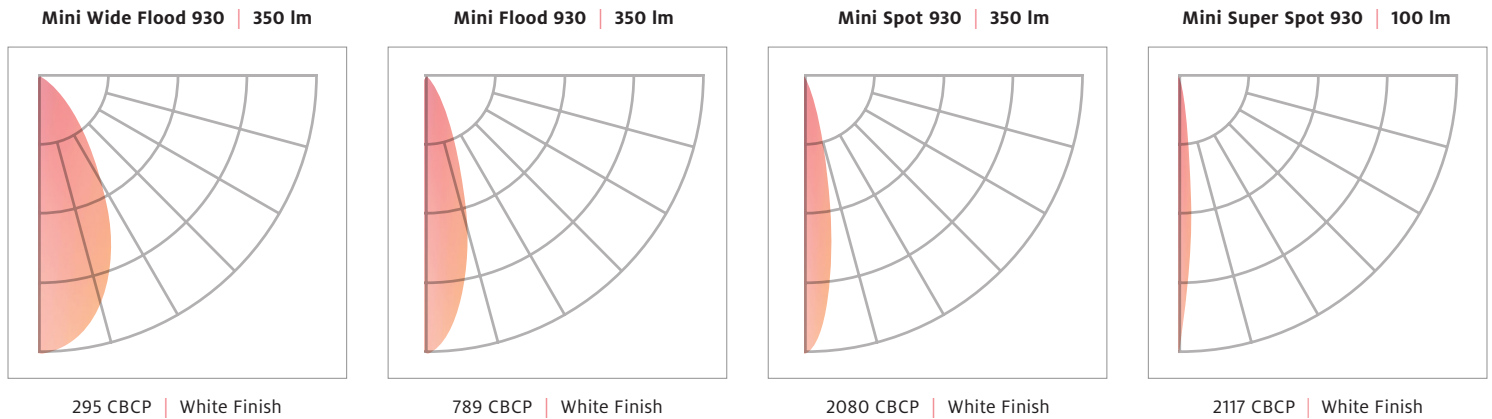


## Dimensions

### Single

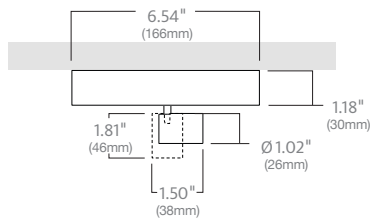

### Triple

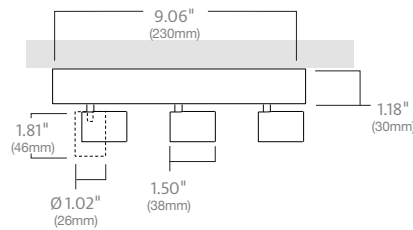

## Technical Detail

**1) Materials:** The lamp unit is made of die-cast aluminum, paint is a powder coat available in Black or White.

**2) Wattage & CCT:** Heads are available in 3.3W and 5W MacAdam 3-step 3000K or 4000K. Available in 90+ CRI only.

**3) Beam Spread:** Unit is available with Spot, Super Spot, Flood, or Wide Flood beam spread.

**4) Dimming:** Non-Potentiometer unit can be dimmed in line with the track with 0-10V dimmer (by others). When controlled with 0-10V dimmer, order Non-Potentiometer version.

The Potentiometer unit enables the luminaire to dim independent of the track. The Potentiometer unit CANNOT be controlled by 0-10V dimmer, can only dim via the Potentiometer.

**5) Accessories:** Anti glare ring and film, Ring Louver and Anti-glare cylinder are available.

**6) Tilt:** The unit can rotate through 360° and tilt through 90°.

**7) Life:** 50,000 hours for luminous flux at 70% of initial value.

**8) Weight:** Single Head: 3.52 oz, Triple Head: 7.05 oz.