

LEDbatwing

SUPERSYSTEM II

LEDatwing

- Designed for Indirect mounting on SUPERSYSTEM II H Track
- Quiet, low profile housing
- Wide uplight distribution for smooth ceiling lighting

DELIVERED LUMENS	WATTS / IC RATING	COLOR TEMPERATURE	COLOR RENDERING
1320 lm	11 W	3000 K 4000 K	CRI 80+



Order Code


SUP2	ID	LED 1300	8	5	LDO	7
-------------	-----------	-----------------	----------	----------	------------	----------

1	FIXTURE	SUP2 SUPERSYSTEM II
2	TYPE	ID Indirect Batwing
3	OUTPUT	LED 1300
4	CRI	8 80 CRI
5	CCT	30 3000 K 40 4000 K
6	DIMMING	LDO Non-Potentiometer
7	COLOR	BK Black WH White

We reserve the right to change, without notice, specifications or materials. Supporting documentation found on zumtobel.us are the most recent versions and supersede all other versions that exist in any other printed or electronic form.


Light Distribution

LEDbatwing 830 | 1300 lm

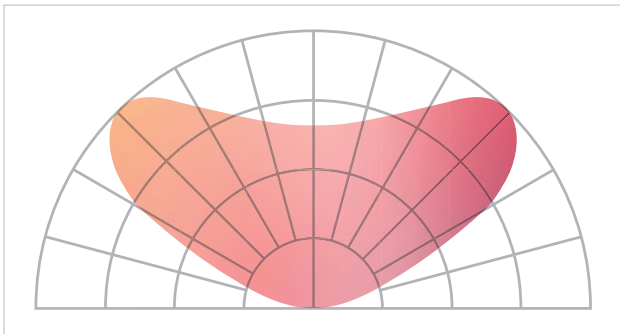

White Finish

Dimensions

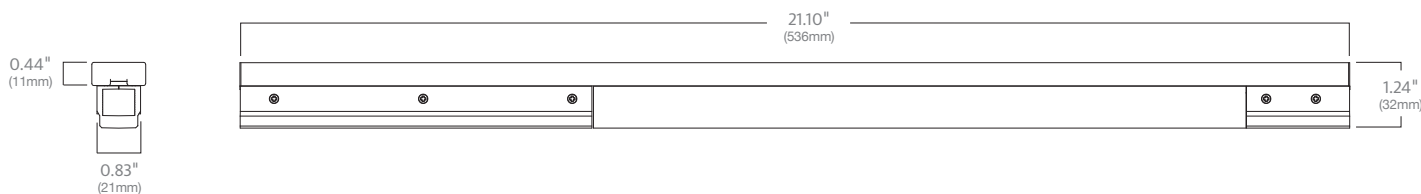

Technical Detail

1) Materials: The luminaire is extruded aluminum, paint is a powder coat available in Black or White

2) Wattage & CCT: The luminaire is available in 11W in MacAdam 3-step 3000 K or 4000 K. Available in 80+ CRI only.

3) Beam Spread: An efficient “batwing” distribution helping luminaires achieve a flatfield, uniform beam profile without a central hot-spot. Vertical Angle 37° Horizontal Angle 13°.

4) Dimming: Non-Potentiometer luminaire can be dimmed in line with the track with 0-10 V dimmer (by others).

5) Life: 50,000 hours for luminous flux at 90% of initial value.

6) Weight: 14 oz