

TECTON® Linear Trunking System

- The world's first continuous-row lighting system to have a 7-pole current conducting section built into the trunking
- All functions, such as power supply and lighting control, completely integrated
- The luminaires can be positioned flexibly, and the system can be adjusted to structural changes at any time
- TECTON® trunking is the functional basis, and the various luminaire elements, light sources or optics can be replaced or added
- Up to 60% shorter installation times
- Lightweight and perfectly fit to be mounted by one person

System Components



Pendant



Ceiling Bracket



Caddy Clip



Starter Feed



Cutting Aid



Terminating End Cap



End Cap



T Corner



X Corner



L Corner


POSSIBLE FEED-IN POINTS TECTON

Starter Feed Feed-in trunking end cap

Mid Feed Female – Female
Male – Female

Empty Trunking Empty end-trunking, can be cut to length flexibly

Terminating End Cap End cap for termination in conformity with relevant standards (standard trunking unit cut to length)

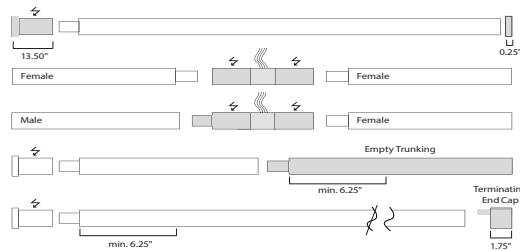

Suitable for dry locations

SEE PAGE 2 FOR QUICK SHIP AVAILABILITY

Trunking Order Code

TECTONT 2 WH

- 1 TYPE **TECTONT** TECTON® Trunking
- 2 LENGTH **1000MM 39" | 1500MM 59" | 2000MM 79" | 3000MM 118" | 4000MM 157"**
- 3 COLOR **WH** White

OPTIONAL COMPONENTS (ORDER SEPARATELY)

22166807 End Caps (Pair) | **22128113** Blank Cover (58" Length) | **22169061** Empty Trunking - No Wiring (39" Length) | **22169062** Terminating End Cap (Single) | **22064924** Cutting Aid

Corners Order Code¹

1 2 3 WH

- 1 TYPE **TVL2** L Corner Female/Male | **TVT3** T Corner Female/Male/Male | **TVT4** T Corner Female/Female/Male | **TVXO** X Corner Female/Female/Male/Male
- 2 FEEDS **NF** None | **SF** Single Feed
- 3 SUSPENSION **000** None | **070** 70" Cable | **157** 157" Cable
- 4 FINISH **WH** White

¹ Signed submittals are required for all configurations. Please consult factory.

Feeds Order Code

TECTON 2 WH 4 F7

- 1 TYPE **TECTON** Feed for TECTON® Trunking
- 2 FEED **MF** Mid Feed¹ | **SF** Pendant Starter Feed | **SM** Surface Starter Feed
- 3 COLOR **WH** White
- 4 FEED CORD LENGTH **C1** 70" Pendant Mount | **C2** 157" Pendant Mount | **SM** 70" Surface Mount
- 5 NO. OF WIRES **F7** 7 Wires

¹ Please consult factory.

Suspensions Order Code

[A]	TECTON	2	3	F7	[B]	TECTON	2	3	[C]	1	
1	TYPE	TECTON Suspension for TECTON® Trunking									
[A] ORDER POWER FEED SUSPENSIONS (PENDANT)											
2	MOUNTING	CBL070 70" Aircraft Cable CBL157 157" Aircraft Cable									
3	CANOPY	J5SW J-Box Mounting 5" Square Flat Canopy, White T5SW T-Bar Mounting 5" Square Flat Canopy, White									
4	NO. OF WIRES	F7 7 Wire Power Feed									
[B] ORDER NON-POWER FEED SUSPENSIONS (PENDANT)											
2	MOUNTING	CBL070 70" Aircraft Cable CBL157 157" Aircraft Cable									
3	CANOPY	J5SW J-Box Mounting 5" Square Flat Canopy, White S2SW 1/4-20 Mounting 2" Square Flat Canopy, White S5SW T1/4-20 Mounting 5" Square Flat Canopy, White									
[C] ORDER MOUNTING KIT (SURFACE)											
1	MOUNTING KIT	TECTONSM Surface Mount Ceiling Bracket for Sheetrock Ceiling TECTONSMIN Surface Mount Caddy Clip for 9/16" Grid Ceiling TECTONSMIW Surface Mount Caddy Clip for 15/16" Grid Ceiling									

Luminaire Order Code

Luminaires must be ordered separately. Link to the compatible products specification sheets here

[ICOS Linear >>>](#) | [ONICO track heads >>>](#) | [TECTON LED Linear and MPO battens >>>](#) | [VIVO Trackheads >>>](#)

Quick Ship Models

TRUNKING

22169057	TECTONT1500MMWH
22169058	TECTONT2000MMWH
22169060	TECTONT4000MMWH

TRUNKING COMPONENTS

22166807	End Caps (Pair)
22128113	Blank Cover (58" Length)
22169062	Terminating End Cap (Single)

FEEDS

11016871	TECTONSFWHC2F7
11016141	TECTONCBL157J5SWF7
11016145	TECTONCBL157J5SW

Technical Detail

1 (a) Trunking: The Trunking is made of roll-formed sheet steel painted with white polyester resin enamel. It has 7 integral current conducting sections for 3 switchable legs, two for dimming control wires, one for neutral and one for ground. It includes integral connector for electrical and mechanical quick connection. It is available in specific lengths that can be cut to size on site using the Cutting Aid (Order Code: 22064924).

1 (b) Terminating End Cap: The Terminating End Cap is field mounted and is used to terminate the wires and to cap a cut piece of trunking unit. Once trunking has been cut, it can only be capped with a Terminating End Cap.

1 (c) Empty Trunking: Empty trunking can be used as a compensation piece for cutting to length special configurations with integrated physical connector. Out of the total length of 39", the cutting range is 33". It offers maximum flexibility in positioning of continuous row luminaires. A new trunking unit can be attached to an uncut empty trunking unit, but will require a new feed. If an empty trunking unit is cut to size, it cannot be

attached to another trunking unit to continue the row. No End Caps are supplied.

2 Feeds: The Starter Feed, for use at the beginning of a row of continuous trunking, contains pre-wired (5) 14-gauge SJT cord. An additional (2) 18-gauge SJT cord is supplied. It provides a feed point for continuous thru wire connection to the next trunking (15A max. rated, in single circuit with three switch legs). It is supplied with a busbar terminator cover, access covers, and 2 end caps (1 is field installed).

3 (a) Pendant Mounting: Aircraft cable is available for junction box mounting or T-bar mounting in standard lengths of 70" and 157". Feed point canopy covers are flat, 5" square, 16-gauge steel, white finish for Starter Feeds. Suspension options for non-power feed end are junction box mounting with 5" square canopy or 1/4-20 fastener with 2" or 5" square canopy. Proprietary CLIX bracket with spring-loaded cable connector attaches to the TECTON® Trunking where needed without fasteners.

3 (b) Surface Mounting: All mounting kits can be fastened to trunking without tools using the CLIX

technology. The CLIX connector-bracket and hardware has a 1/2" diameter hole for fasteners by others and a 7/16" gap to ceiling surface. For sheet-rock ceiling, the ceiling bracket can be clipped to the housing for support without fasteners. For grid ceilings, caddy clips made of stainless steel are available. The maximum tensile load is 66 lbs.

3 (c): The maximum distance between suspension points should not exceed 8' for TECTONSMIW Surface Mount Caddy Clip for 15/16" Grid Ceiling, and 4' for TECTONSMIN Surface Mount Caddy Clip for 9/16" Grid Ceiling. Distance from end of housing to first or last suspension point should be between 4" and 30". Finished suspension length will be reduced by a maximum of 30" depending on location of first and last aircraft cable.

4 Weight:

Trunking	1.75 lbs (20")
Empty trunking	3.7 lbs (39")
Cutting Aid	1.5 lbs
Starter Feed: 7 wire 70"	2 lbs
Starter Feed: 7 wire 157"	4 lbs

Downloads

[Installation Instructions](#)



[Dimensional Drawings](#)



We reserve the right to change, without notice, specifications or materials. Supporting documentation found on zumtobel.us are the most recent versions and supersede all other versions that exist in any other printed or electronic form.